Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 222738 (205211-1)

DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F
BD	48		

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPD
	H	REV PER EC 0U1D-0260-00	12 SEP 01	JR

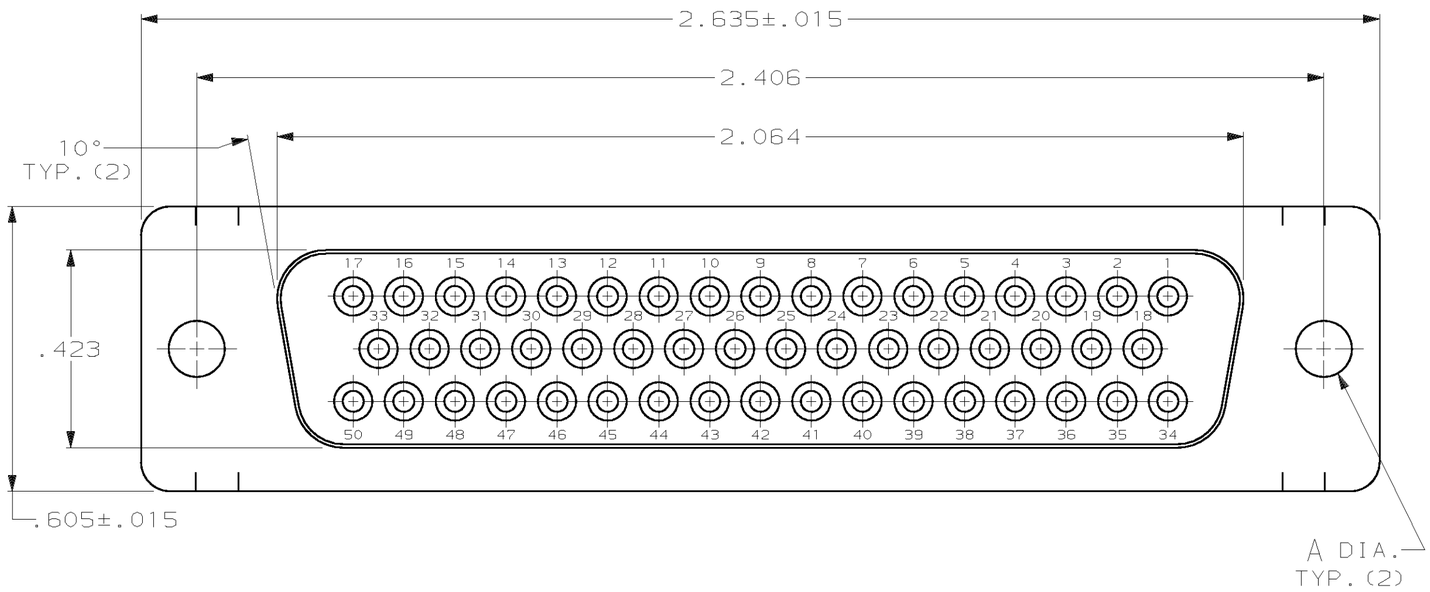

1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. CONNECTOR COMPLIES WITH AMP SPEC. 108-40,005 WHERE APPLICABLE.
3. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
4. STEEL PER ASTM A109.
5. ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
6. TIN PLATED PER MIL-T-10727.

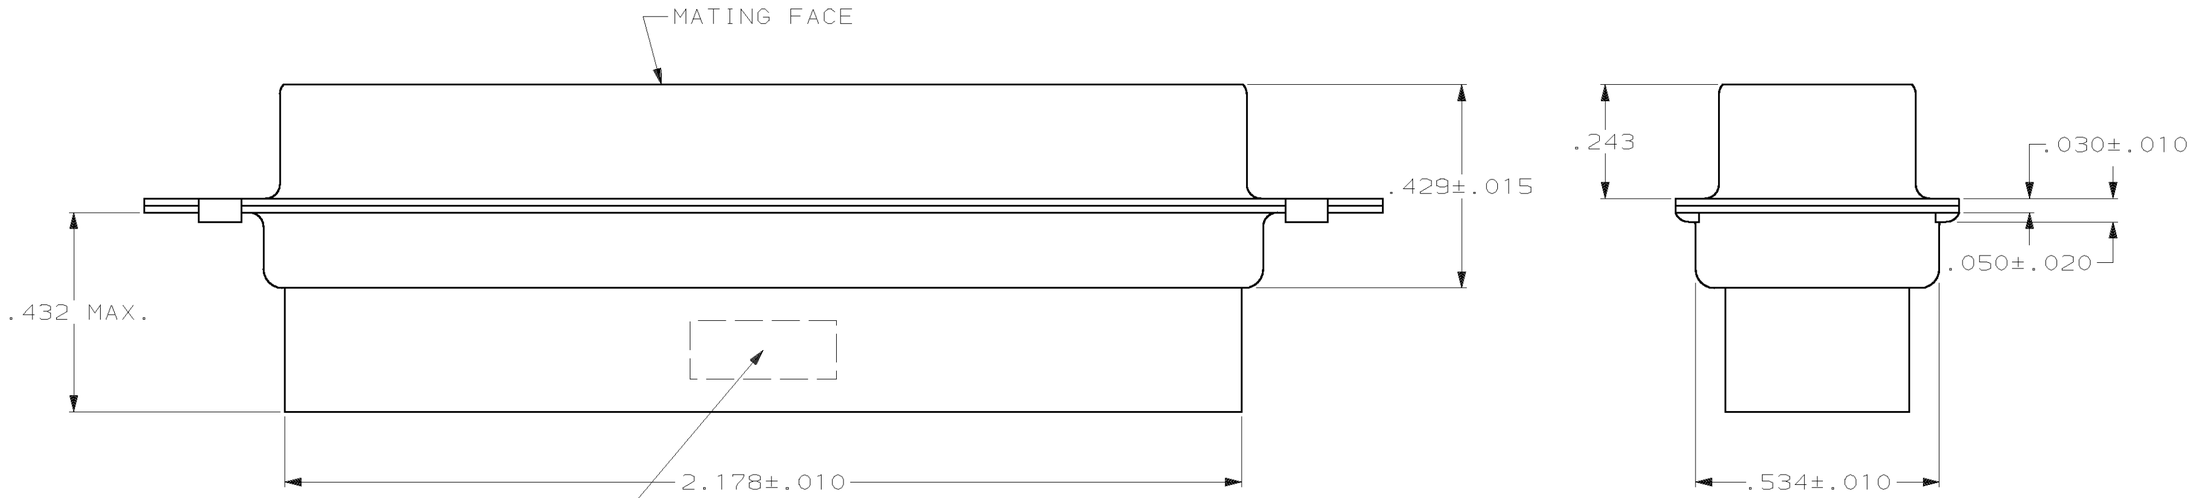

SUPERSEDED BY 205211-1	SMALL PACK	5	.120	205211-5
OBSOLETE	STANDARD	6	.154	205211-4
	STANDARD	6	.120	205211-2
	STANDARD	5	.120	205211-1
	PACKAGING TYPE	SHELL FINISH	A	PART NUMBER

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES.
TOLERANCES ON :
2 PLC DEC ±-
3 PLC DEC ± .005
ANGLES ± 2°

MATERIAL
MOLDED PART: 3
SHELLS: 4

FINISH
SHELLS: SEE TABLE

DR 7-19-85 S.WELDON
CHK 7-29-85 J.GERACE
APPD 7-29-85 L.BREKOSKY
APPD 7-31-85 V.KUMAR
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
RECEPTACLE CONNECTOR, SIZE 5, 50 POS., AMPLIMITE™HDP

SIZE	CAGE CODE	DRAWING NO
C	00779	C-205211

SCALE 4:1 SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

AMP 1471-6 REV 3-92

CUSTOMER DRAWING

205211